


Hyper Pro 200



1. Structure

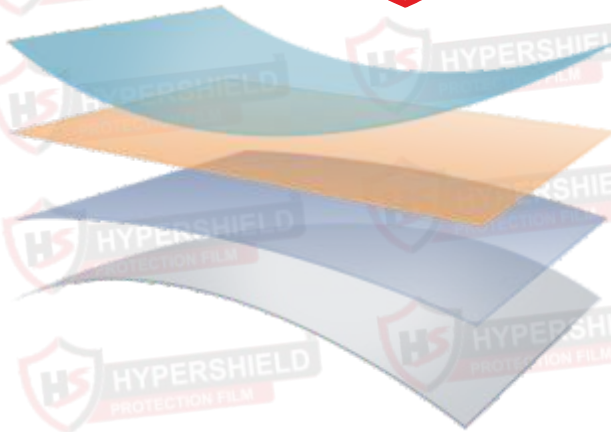

Coating

Lubrizol Base Film / Urethane

PSA Glue/Ashland

Liner

2. Spec Data

2.1. Appearance Performance

Item	Paint Protection Film		
Function	Paint Protection		
Type	HYPER PRO - 200		Test Method
Liner Bubbles	Visually Invisible		Visual Test
Dust	Visually Invisible		Visual Test
Crystal Points	0.1-0.6mm	Allowed	Visual Test
	0.7-2.9mm	<10	Visual Test
	≥3.0mm	1 Max	Visual Test
Coated Dump	Visually Invisible		Visual Test
Glue Line	Visually Invisible		Visual Test

Test Method Description:

- ◆ For coated dumb strips
Check the surface of the sample with natural vision;
- ◆ For crystal points
Take the most dense area of sampled crystal points as the measuring area, and take 12.7cm*12.7cm is the counting interval for size and quantity evaluation.